

SLIM Tach ST85

NorthStar™ brand

Bearingless Encoder

Key Features

- Redesigned using our Revolutionary Sensor Technology to provide a Large Air Gap of 0.060"
- Bearingless Design Mounts to 180 C-Face Motors
- Dual C-Face Versions Available for "Sandwich" Mounting
- Anodized Aluminum Housing with Field-Serviceable Connector
- Single or Dual Isolated Outputs Available



SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS

Code: Incremental
Pulses per Revolution: 64-2048
Phasing Sense: A leads B for Counter-Clockwise rotation (CCW) viewing encoder-mounted end
Quadrature Phasing: $90^\circ \pm 45^\circ$
Symmetry: $180^\circ \pm 54^\circ$
Index: Less than phase A/B pulse width
Number of Output Modules: Single or Dual Redundant

ELECTRICAL

Input Voltage Requirement: 5-26 Volts DC
Current Requirement: 95 mA typical per sensor module plus line driver load
Output Signals:
 With Elec Option V: 5-26 V Line Driver, 150mA
 With Elec Option 5: 5V Line Driver, 150mA
Frequency Response: 0 - 180kHz Data & Index
Electrical Immunity: 2kV ESD, Reverse Polarity, Short Circuit
Connector: 10 pin industrial duty latching, sealed NEMA 4 & 12, IP65; MS connector or pig-tail

MECHANICAL

Max. Shaft Speed: 7,000 RPM
Mounting Configuration: 8.5" 180C face mount for NEMA MG1 standards
Housing Material: Aluminum
Acceleration Rate: 3,600 rpm/sec max
Shaft Length Required: 0.7" min
Allowable Shaft End-Play: $\pm 0.1"$
Allowable Shaft Runout: 0.005" TIR

ENVIRONMENTAL

Operating Temperature Range:
 Standard: -40°C to $+100^\circ\text{C}$
 Optional: Extended, -40°C to $+120^\circ\text{C}$
Storage Temperature Range: -40°C to $+120^\circ\text{C}$
Humidity: to 100% RH
Shock: 300 G's Min.
Vibration: 20 G's @ 5-2000 Hz spectrum

ELECTRICAL CONNECTIONS

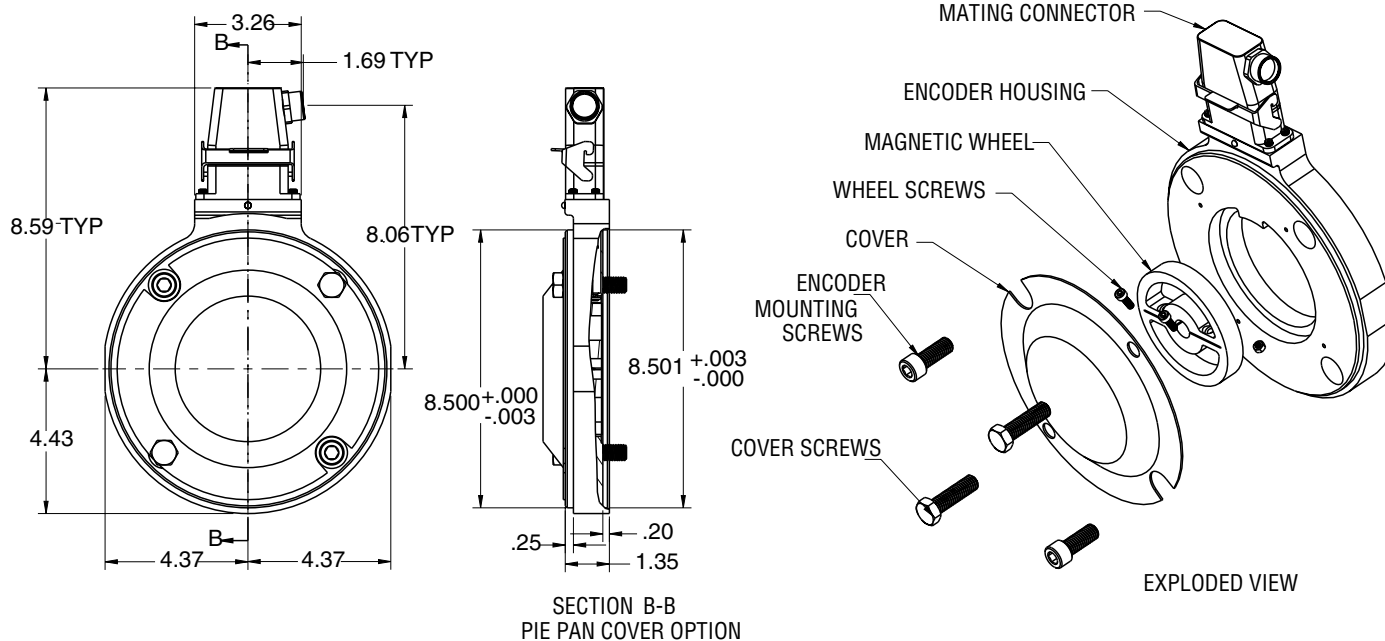
Signal	Connector Pin	Pigtail Cable	MS 3102E18-IT#	Conduit Box
Common	1	Black	F	1
B	2	Green	B	5
A	3	Blue	A	3
Z *	4	Violet	C	7
No Connection	5	—	E	—
Vcc (5-26 VDC)	6	Red	D	2
B	7	Yellow	I	6
A	8	Gray	H	4
Z *	9	Orange	J	8
Shield	10	Braid	G	—

* Index (Z) optional. See Ordering Information

Ordering Information

To order, complete the model number with code numbers from the table below:

Code 1: Model	Code 2: PPR	Code 3: Index	Code 4: Shaft Size	Code 5: Termination	Code 6: Electrical	Code 7: Cover/Adapter
□ □ □	□ □ □ □	□	□ □ □	□	□	□
Ordering Information						
ST8 Direct Motor Mounting on NEMA 180 flange (8.5"), Single Output	0064 0128 0256 0512 1024 2048	L No Index Z Index	C04 0.625" C13 1.875" C05 0.875" C14 2.000" C06 1.000" C15 2.125" C07 1.125" C16 2.250" C08 1.250" C17 2.375" C09 1.375" C18 2.500" C10 1.500" C19 2.875" C11 1.625" C20 2.625" C12 1.750" End of Shaft Mounting G01 1.125" EOS G06 2.375" EOS G08 2.625" EOS G10 2.875" EOS Additional Shaft Sizes Available Including Metric	B Conduit Box C Latching Industrial Connector with 1/2" NPT D 1" Extended Height Latching Industrial Connector with 1/2" NPT E 3" Extended Height Latching Industrial Connector with 1/2" NPT M 10 pin MS Connector N 10 pin MS 3112 Connector P 18" Pigtail Cable (25" when Code 6 = H) Q Latching Industrial Connector on 18" Pigtail Cable	V 5-26V in, 5-26V Line Driver (IC-WE) out 5 5-26V in, 5V out Line Driver (IC-WE) H Same as V but with High Temperature, Extended Operating Range to 120°C	CC Flat No-Hole Cover EE Extra Heavy Duty Steel Cover FF Flat Thru-Hole Cover PP Extra Heavy Duty Steel Pie-Pan Cover

DIMENSIONS inch

Worldwide Brands: NorthStar™ • Acuro™ • Dynapar™ • Hengstler™ • Harowe™

DYNAPAR™
INNOVATION - CUSTOMIZATION - DELIVERYWWW.DYNAPAR.COM

Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA

Customer Service:

Tel.: +1.800.873.8731

Fax: +1.847.662.4150

custserv@dynapar.com**Technical Support**

Tel.: +1.800.234.8731

Fax: +1.847.662.4150

northstar.techsupport@dynapar.com**European Sales Representative**

Hengstler GmbH

Uhlandstrasse 49, 78554 Aldingen

Germany

www.hengstler.com