


IBOCO®


Introduces Liquid-Tight Connectors and Tubing

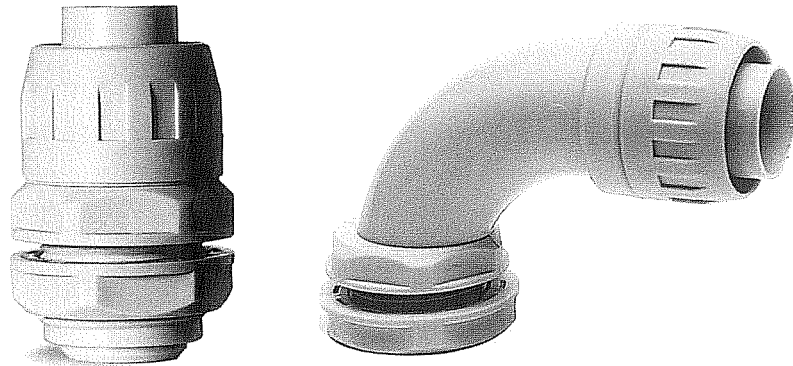

New liquid-tight connectors

IBOCO®'s straight and right angle (90°) liquid-tight non-metallic connectors are designed to fit with the company's line of flexible liquid-tight PVC tubing to ensure leak-proof integrity on motors, processing equipment, pumps, etc. Available in light grey or black.

Choose IBOCO®'s liquid-tight connectors for:

- A liquid-tight environmental seal
- Quick re-entry for cable repair or rerouting
-  recognition
- CE certified
- IP 65-rated for watertight applications

Product characteristics:

- Suitable for indoor and outdoor applications
- Corrosion resistant
- Resists solvents, grease, oil, alcohol, gasoline, and saltwater
- Adjustable collar
- Operating temperature -4°F to +140°F

Specifications:

Straight liquid-tight connectors

CATALOG NUMBER	NOMINAL ID	ACTUAL ID	PCS PER PACK
RA-12*	3/8"	0.47"	20
RA-16*	1/2"	0.63"	20
RA-20*	3/4"	0.79"	20
RA-25*	1"	0.98"	10
RA-32*	1-1/4"	1.25"	10
RA-40*	1-1/2"	1.57"	5
RA-50*	2"	1.97"	5

*Color: Add suffix "G" for light grey or "K" for black.


Specifications:

90° liquid-tight connectors

CATALOG NUMBER	NOMINAL ID	ACTUAL ID	PCS PER PACK
CUR-12*	3/8"	0.47"	25
CUR-16*	1/2"	0.63"	25
CUR-20*	3/4"	0.79"	15
CUR-25*	1"	0.98"	5
CUR-32*	1-1/4"	1.25"	5


*Color: Add suffix "G" for light grey or "K" for black.

New I-Flex Flexible Liquid-Tight PVC Tubing

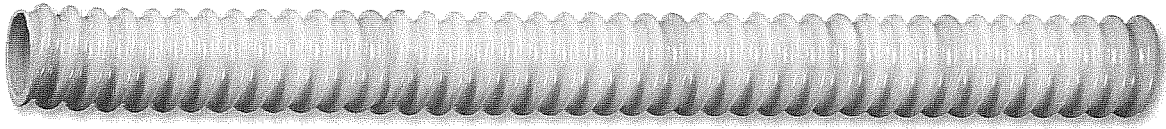

IBOCO®'s new I-Flex liquid-tight flexible tubing provides electrical wire protection during routing applications. I-Flex is designed for maximum flexibility and can be used in extremely tight quarters. Excellent for general applications where fast installation and maximum flexibility are required. Ideal in areas where movement, vibration, or flexing is a problem. Provides excellent tensile strength and has a smooth interior wall for pull-out protection. Withstands temperatures up to +140°F. Available in light grey or black.

Choose IBOCO®'s I-Flex liquid-tight PVC tubing for:

- Applications where oil resistance is required, or where water corrosion or ultraviolet light is a problem
- Protection of fiber optic cable
- Installing instrumentation or control cable
- Wire harness protection
- Packaging equipment
- Marine applications
-  recognition
- CE certified
- IP 65-rated for watertight applications
- Operating temperature -4°F to +140°F

Specifications:

I-Flex liquid-tight flexible tubing

CATALOG NUMBER	NOMINAL ID	ACTUAL ID	COIL LENGTH
GUA-12*	3/8"	0.47"	98' (30 mtrs)
GUA-16*	1/2"	0.63"	98' (30 mtrs)
GUA-20*	3/4"	0.79"	98' (30 mtrs)
GUA-25*	1"	0.98"	98' (30 mtrs)
GUA-32*	1-1/4"	1.25"	98' (30 mtrs)
GUA-40*	1-1/2"	1.57"	98' (30 mtrs)
GUA-50*	2"	1.97"	98' (30 mtrs)

*Color: Add suffix "G" for light grey or "K" for black.



26 Northfield Avenue • Edison, NJ 08837 • Phone: 732-417-0066 • Fax: 732-417-1166

www.iboco.com • e-mail: iboco@iboco.com